

AVC075 LF Centrifugal Fan Specification Sheet




Technical Details

Construction	Impact resistant ABS thermoplastic
Rating	220-240V ~50Hz~AC 12.4W
IP Rating	IPX4
Class	Double Insulated <input type="checkbox"/>
Motor	Single-phase induction motor with pre-oiled bearings; All with thermal overload protection. Maximum operating Temperature 40°C
Approvals	CE
Warranty	5 Years Exchange
Country of Origin	UK
Manufacturer	Addvent

Performance Details

Specification	m ³ /Hr	l/s	dB(A) @ 2m	Power (W)	Max (pa)
AVC075LF	94	26	36	12.4	79

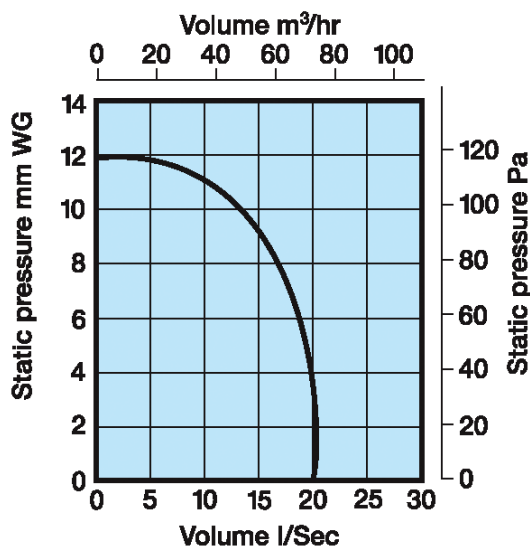


Key Features

- Flush or surface mountable
- Adjustable rear spigot
- Wall or ceiling mountable (except Pull-cord versions)
- Back draft shutter as standard
- Integral back draft shutter
- Part L & F Compliant

Models

Model No.	Product Description
AVC075SLF	Standard Centrifugal Fan
AVX075PLF	Pull cord Centrifugal Fan
AVC075TLF	Timer Centrifugal Fan with Integrated Adjustable Timer: 1 - 20 Minutes
AVC075HLF	Centrifugal fan with Internal Humidistat Model: RH 20 - 90 %, With Timer: 1 - 20 minutes
AVC075HPLF	As above with Pull Cord

Dimensions

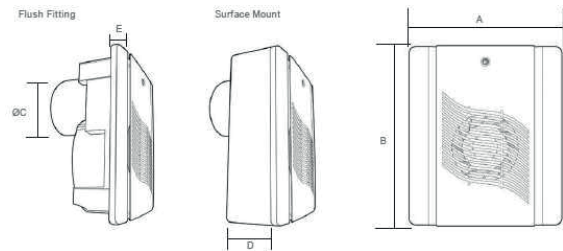

Dimension	A	B	ØC	D	E
AVC075 LF Range	210	265	100	90	17

Additional Information

Wall Hole Size	112mm
----------------	-------

Installation Information

Designed to be mounted in walls or ceilings and discharged through a 100mm standard flexible or rigid duct.
Suitable for use with flat channel ducting systems.



Tel: +44 (0)117 923 5375
Email: enquiries@addvent.co.uk