


AVX100QS

## features

- 60% quieter than a standard 100mm fan
- low SFP for efficiency
- designed for 2010 Building Regulations
- integral backdraft shutter on all models
- for wall or ceiling mounting

## dimensions

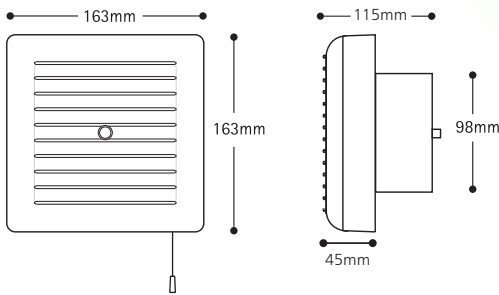

Wall hole size: 112mmØ



specific fan power

NOW: **0.24**  
W/litres/sec

key data: AVX100Q range


Airflow m <sup>3</sup> /hour	<b>75</b>	Power Watts	<b>4.8</b>
litres/sec	<b>21</b>	Noise dB(A)	<b>27</b>



## performance

	airflow m <sup>3</sup> /hour	airflow litres/sec	noise level dB(A)@ 2m	power W
AVX100Q range	75	21	27	4.8

### performance for the low-noise range

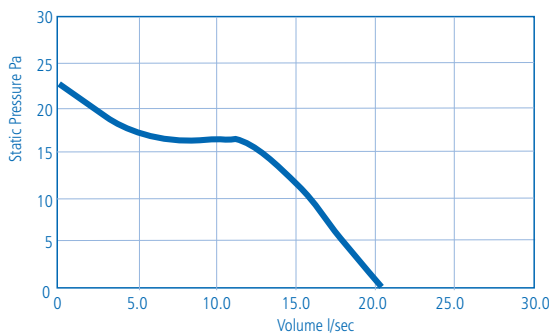

## the whisper quiet low-noise range

- AVX100QS** Whisper-quiet low-noise standard model.
- AVX100QP** Whisper-quiet low-noise pull-cord model.
- AVX100QT** Whisper-quiet low-noise model with integrated adjustable timer: 1-20 mins.
- AVX100QH** Whisper-quiet low-noise humidistat model with integrated adjustable timer: 1-20 mins and adjustable humidity: 20-95%.

29

## accessories

- AVA001** AVX100 Chrome Cover.
  - AVA002** AVX100 Gold Cover.
  - AVA010** 10 Pack 50-110mm Worm Drive Clamps.
  - AVA050** 100mm x 10m Flexible Aluminium Duct.
  - AVA100** 100mm Rigid Aluminium Duct 1.5m.
  - AVA120** 100mm PVC Ducting 3m.
  - AVA150** 100mm Fixed External Grille (Grey).
  - AVA160** 100mm Gravity Shutter (Grey).
  - AVA270** 100mm Through Wall Vent Kit.
  - AVA440** 100mm Condensation Trap.
  - SYSTEM 54** 110 x 54 Flat channel ducting, fittings and accessories.
  - SYSTEM 60** 204 x 60 Flat channel ducting, fittings and accessories.
- See pages 66-72 for the full range of accessories.

## technical data

**APPROVAL:** BEAB; **RATING:** output: 220-240V AC ~50Hz 4.8W; input: 220/240 V ~50Hz; IP44; **CONSTRUCTION:** double-insulated impact-resistant ABS thermoplastic; **MOTOR:** 230V AC induction motor with pre-oiled bearings, 50 Hz. With thermal overload protection; **MAXIMUM OPERATING TEMPERATURE:** 40°C. **CE**