


## Addvent In-Line Shower Fan







### Technical Details

<b>Construction</b>	Impact resistant ABS thermoplastic;
<b>Rating</b>	220-240V ~50Hz~AC 20W 100mm, 25W 150mm
<b>IP Rating</b>	<b>IP24</b>
<b>Class</b>	Double Insulated 
<b>MOTOR:</b>	Single-phase induction motor with pre-oiled bearings; All with thermal overload protection
	Maximum operating Temperature 40°C
<b>Approvals</b>	BEAB, CE
<b>Warranty</b>	5 Years Exchange
<b>Country of Origin</b>	UK
<b>Manufacturer</b>	Addvent

### Performance Details

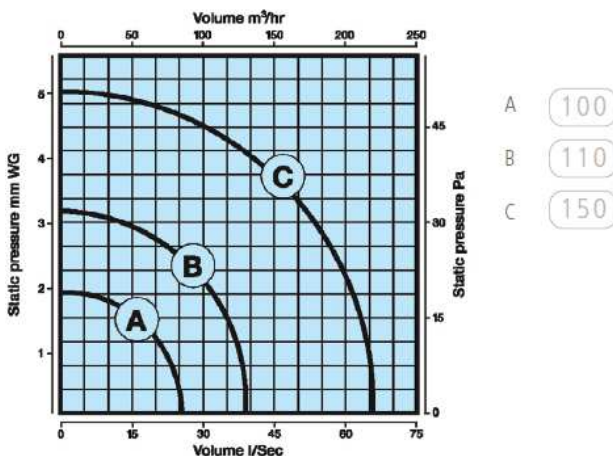Induct Range	m <sup>3</sup> /hr	l/s	dB(A) @ 3m	Power (W)	Max (pa)
100mm	85	23	41	20	20
150mm	230	64	40	25	50



- A 
- B 
- C 

## Product Description

In-Line Axial Shower Fan Range


### Key Features

- Safe, Remote Mounting
- AVX100 23 litres/sec (85m<sup>3</sup>/hr)
- AVX150 64 litres/sec (230m<sup>3</sup>/hr)
- Quiet yet powerful
- Suitable for in-duct mounting only


### Models

Model No.	Product Description
AVX100IDTSLB	Induct Shower Light Fan Kit with Timer—Brass
AVX100IDTSLCN	Induct Shower Light Fan Kit with Timer—Chrome
AVX100IDTSL	Induct Shower Light Fan Kit with Timer—White
AVX150IDFSLC	Induct Shower Light Fan Kit with Timer—Chrome
AVX150IDTSLB	Induct Shower Light Fan Kit with Timer—Brass

### Dimensions



Size	ØA	B	C
100	100	90	27
150	150	109	27



Size	A	B	C	Hole Size (mm)
100	140	98	74	102
150	195	144	74	154

### Installation

AVX100IDTSLCN/B shower light fan is supplied complete with a 3m length of flexible PVC ducting

AVX150IDTSLC/B shower light fan is supplied complete with a 5m length of Flexible PVC Ducting