

AVC060 Centrifugal Fan Range Specification Sheet



Key Features

- Suitable for wall or ceiling mounting
- Back draft shutter as standard
- 25 litres per second flow rate


Models

Model No.	Product Description
AVC060SN	Standard Centrifugal Fan
AVX060PN	Pull cord Centrifugal Fan
AVC060TN	Timer Centrifugal Fan with Integrated Adjustable Timer: 1 - 20 Minutes
AVC060HTN	Centrifugal fan with Internal Humidistat Model: RH 20 - 90 %, With Timer: 1 - 20 minutes

Technical Details

Construction	Impact resistant ABS thermoplastic
Rating	220-240V ~50Hz~AC 25W
IP Rating	IPX4
Class	Double Insulated <input type="checkbox"/>
Motor	Single-phase induction motor with pre-oiled bearings; All with thermal overload protection. Maximum operating Temperature 40°C
Approvals	BEAB, CE
Warranty	5 Years Exchange
Country of Origin	UK
Manufacturer	Addvent


Dimensions

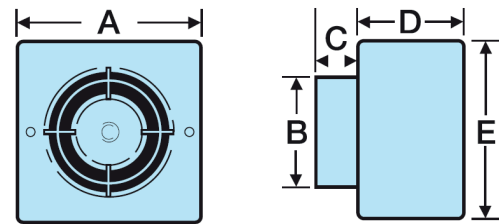

Dimension	A	B	C	D	E
AVC060 Range	163	98	75	95	163

Performance Details

Specification	m ³ /Hr	l/s	dB(A) @ 2m	Power (W)	Max (pa)
AVC060 Range	90	25	42	25	120

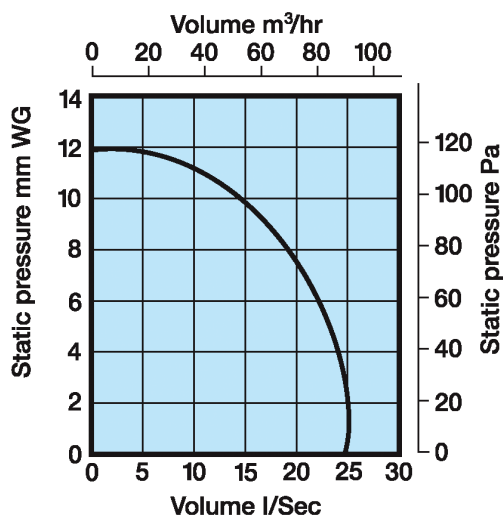

Additional Information

Wall Hole Size 112mm

Installation Information

Designed to be mounted in walls or ceilings and discharged through a 100mm standard flexible or rigid duct.

Suitable for use with flat channel ducting systems.



Tel: +44 (0)117 923 5375
Email: enquiries@addvent.co.uk