


AVC090 Enhance Range Specification Sheet



Technical Details

Construction	Impact resistant ABS thermoplastic
Rating	220-240V ~50Hz ~AC
IP Rating	IPX4
Class	Double Insulated \square
Motor	Single-phase induction motor with pre-oiled bearings; All with thermal overload protection Maximum operating Temperature 40°C
Approvals	BEAB, CE
Warranty	5 Years Exchange
Country of Origin	UK
Manufacturer	Addvent

Performance Details

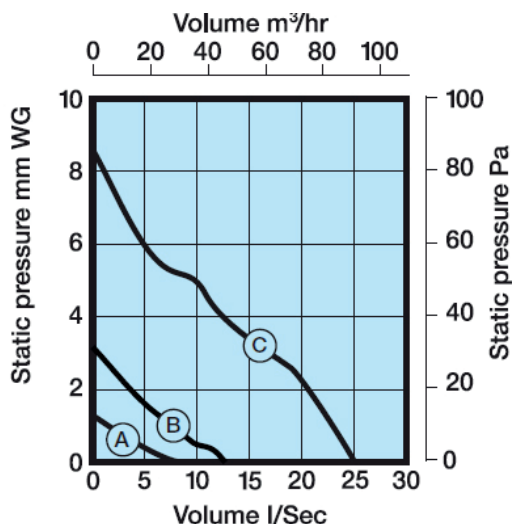

VERSION 1 10/17


Key Features

- Wall, ceiling mounting
- Surface or Flush mounted
- Adjustable rear spigot
- Designed to run continuously with boost function to comply with Part F
- DC Low energy motor

Models

Model No.	Product Description
AVC090QETB	Continuous trickle boost fan with built in over run timer; humidistat and pull cord override
AVC090QETBLV	Low Voltage version of above supplied with transformer

Dimensions

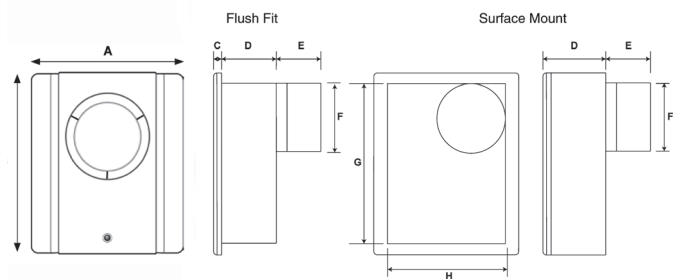

Model	A	B	C	D	E	F	G	H
AVC090QETB	208	255	19*	68(87)	83	98	225*	178*

Additional Information

Specification	Flow (l/s)	Power (W)	Sound d(B)A
Trickle	8	1.5	24.5
Boost 1	13	2.5	28.5
Boost 2	23	8	36.5

Installation Information

Designed to be mounted on walls or ceilings and discharged through a 100mm standard rigid or flexible duct, also suitable for use with flat channel systems.

Maximum pressure	75.5pa
Sound Volume	36d(B)A

SPF

The SPF at Various Speeds

Trickle	0.18
Lower Boost	0.19
Boost	0.32



Tel: +44 (0)117 923 5375

Email: enquiries@addvent.co.uk