

# AVCI 10 Centrifugal Fan Range Specification Sheet




## Technical Details

Construction	Impact resistant ABS thermoplastic
Rating	220-240V ~50Hz~AC 25W
IP Rating	IPX4
Class	Double Insulated <input type="checkbox"/>
Motor	Single-phase induction motor with pre-oiled bearings; All with thermal overload protection. Maximum operating Temperature 40°C
Approvals	BEAB, CE
Warranty	5 Years Exchange
Country of Origin	UK
Manufacturer	Addvent

## Performance Details

Specification	m <sup>3</sup> /Hr	l/s	dB(A) @ 2m	Power (W)	Max (pa)
AVCI 10 Range	110	31	45	25	120

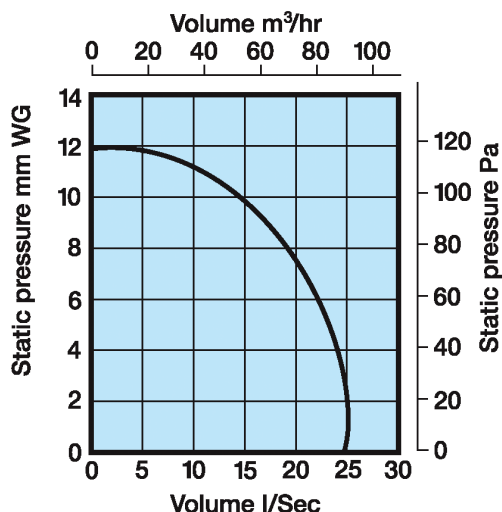


## Key Features

- Suitable for wall or ceiling mounting
- Back draft shutter as standard
- 31 litres per second flow rate

## Models

Model No.	Product Description
AVCI 10S	Standard Centrifugal Fan
AVXI 10P	Pull cord Centrifugal Fan
AVCI 10T	Timer Centrifugal Fan with Integrated Adjustable Timer: 1 - 20 Minutes
AVC060HT	Centrifugal fan with Internal Humidistat Model: RH 20 - 90 %, With Timer: 1 - 20 minutes
AVC060H9	As above with Pull Cord

## Dimensions

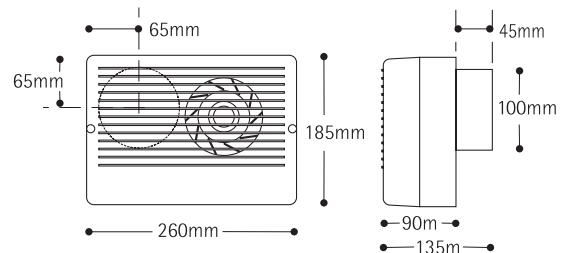

## Additional Information

Wall Hole Size	112mm
----------------	-------

## Installation Information

Designed to be mounted in walls or ceilings and discharged through a 100mm standard flexible or rigid duct.

Suitable for use with flat channel ducting systems.



Tel: +44 (0)117 923 5375

Email: [enquiries@addvent.co.uk](mailto:enquiries@addvent.co.uk)