

features

- AVCIMF100TSLC mixed flow showerlight
- distinctive light in a circular diffuser for ventilation and illumination
- axial or centrifugal models
- white, brass or chrome fascia
- only suitable for ceiling mounting through flexible ducting or rigid pipes
- adjustable timers on all models: 1-20 mins



specific fan power

NOW:
100 model **0.43**
150 model **0.31**
W/litres/sec

key data: **AVCIMF100TSLC**

Airflow m ³ /hour	254	Power Watts	25
litres/sec	70	Noise dB(A)	24


AVCIMF100TSLC



performance

	airflow m ³ /hour	airflow litres/sec	noise level dB(A)@ 2m	power W
AVX100IDT/SLLF	85/86	23/24	41/41	20/10.4
AVC110IDT	110	31	45	20
AVCPRO120CDFSLC	180	50	43	32
AVX150IDT/SLLF	230/227	64/63	40/40	25/20.2
AVCIMF100TSLC	254	70	24@3m	25

performance for showerlight range

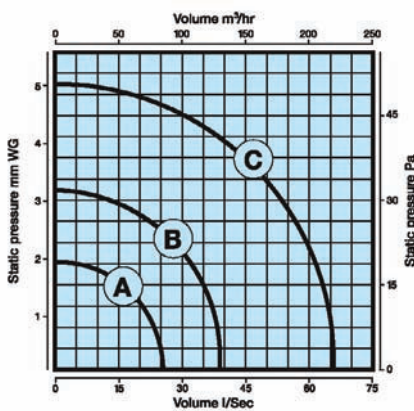

- A (100) AVX
- B (110) AVC
- C (150) AVX

LIGHT RATING/OUTPUT: 12V AC ~50Hz; INPUT: 220/240 V ~50Hz, IP24;
 □ ▲; MAXIMUM PRESSURE: AVX100: 20pa, AVC110: 120pa, AVX150: 50pa; FAN SPEED: 2400rpm, AVC 1400rpm; TIMER: adjustable 1-20 mins; CONSTRUCTION: moulded high temperature VO rated thermoplastic; BULB: GU5.3 35W Dichroic; MOTOR: Single phased induction motor with pre-oiled bearings. Thermal overload protection; MAX OPERATING TEMP: 40°C; AVCPRO120CDFSLC 60°C. **CE**

IP 24 **IP X4** **ZONE 1** **WARRANTY 5**
 AVCIMF EXCHANGE

the showerlight range

- AVX100IDTSLB** Axial In-Duct in brass with adjustable timer.
- AVX100IDTSLCN** Axial In-Duct in chrome with adjustable timer.
- AVX100IDTSL** Contract Pack: white
- AVC110IDTSLB** Centrifugal In-Duct in brass with adjustable timer.
- AVC110IDTSLC** Centrifugal In-Duct in Chrome with adjustable timer.
- AVCPRO120CDFSLC** Centrifugal In-Duct in Chrome
- AVX150IDTSLB** In-Duct in Brass with adjustable timer.
- AVX150IDTSLC** In-Duct in Chrome with adjustable timer.
- AVCIMF100TSLC** Mixed flow model in chrome with adjustable timer.
- AVX100IDTSLLF** 100mm Showerlight Fan Kit incorporating integral adjustable electronic timer (1-20 mins). Also comes with 1.5m PVC ducting, grille fixing clips, cable ties ,screw plugs as well as both internal and external grilles.
- AVX150IDTSLLF** 150mm Showerlight Fan Kit incorporating integral adjustable electronic timer (1-20 mins). Also comes with 3m PVC ducting, grille fixing clips, cable ties, screw plugs as well as both internal and external grilles.



a range of accessories are available for the showerlight range

accessories

- AVA212C** 100mm Chrome Bezel.
- AVA212B** 100mm Brass Bezel.
- AVA213C** 150mm Chrome Bezel.
- AVA213B** 150mm Brass Bezel.
- AVA440** 100mm Condensation Trap.

See pages 49-56 for the full range of accessories.