

AVX100LEDSL

75%

MORE EFFICIENT
THAN CONVENTIONAL SHOWERLIGHT FAN



specific fan power

NOW: **0.43**
W/litres/sec

key data: AVXLED range

Airflow m ³ /hour	86	Power Watts	10.4
litres/sec	24	Noise dB(A)	41


the led showerlight range

AVX100LEDSL Timer LED-powered model.

features

- NEW 3W LED showerlight
- Part L and Part F compliant
- for use in Zone 1 – splash area
- backdraught shutter
- adjustable overrun timer: 1-20 mins
- warm white lamp
- white or chrome finish

dimensions

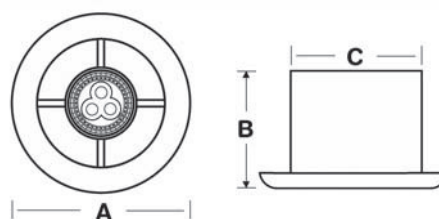

model	A	B	C	hole size
AVX100LEDSL	140	74	98	102



the LED showerlight comes as a kit including the fan, showerlight, LED driver a 1.5m length of flexible ducting an external wall grille and all fixings

accessories

AVA212B
AVA440

100mm Brass Bezel.


100mm Condensation Trap.

See pages 49-56 for the full range of accessories.

performance

	airflow m ³ /hour	fan speed litres/sec	fan speed rpm	noise level dB(A)@ 2m	power W
AVX100LEDSL	86	24	2400	41	10.4

A 100 AVXLED

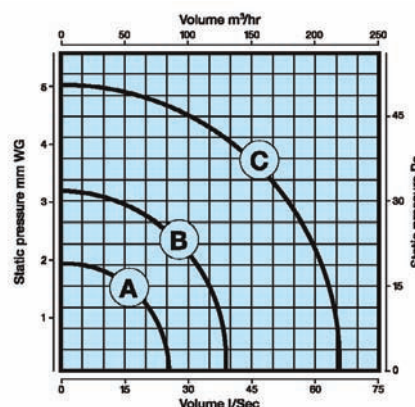

technical data

APPROVAL: BEAB approved; INPUT: 220/240 V ~50Hz; OUTPUT: 12V DC 3W GU5.3 sealed lamp powered by LED driver, IP24; ; FAN SPEED: 2400rpm; MAX PRESSURE: 20pa; CONSTRUCTION: moulded VO-rated thermo-plastic; MOTOR: Single phased induction motor with pre-oiled bearings. Thermal overload protection; MAX OPERATING TEMPERATURE: 40°C;