

AVX100 Enhance Quiet Range Specification Sheet




Key Features

- Designed to run continuously with boost function, complies with system 3 of building regulations
- Quietest Addvent fan - only 15d(B)A
- Highly efficient - consumes just 3.5W
- Suitable for bathrooms, toilets and wet rooms

Models

| Model No. | Product Description |
|------------|---|
| AVX100QETB | Continuous trickle boost fan with built in over run timer |

Dimensions

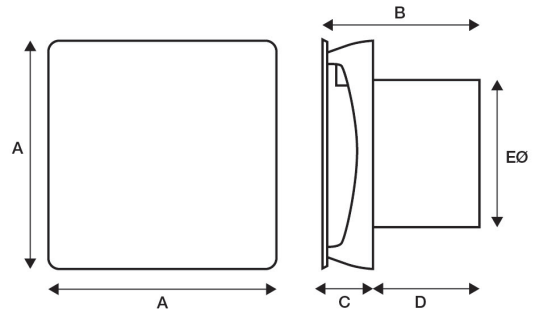

| Model | A | B | C | D | EØ |
|------------|-----|-----|----|----|----|
| AVX100QETB | 159 | 121 | 41 | 80 | 99 |


Technical Details

| | |
|-------------------|--|
| Construction | Impact resistant ABS thermoplastic |
| Rating | 220-240V ~50Hz ~AC |
| IP Rating | IPX4 |
| Class | Double Insulated <input type="checkbox"/> |
| Motor | Single-phase induction motor with pre-oiled bearings; All with thermal overload protection Maximum operating Temperature 40°C |
| Approvals | BEAB, CE |
| Warranty | 5 Years Exchange |
| Country of Origin | UK |
| Manufacturer | Addvent |

Additional Information

| Flow (l/s) | Power (W) | Sound d(B) A @3m | Max Pressure (pa) |
|------------|-----------|---------------------|----------------------|
| 21 | 7 | 29 | 20 |

Performance Details

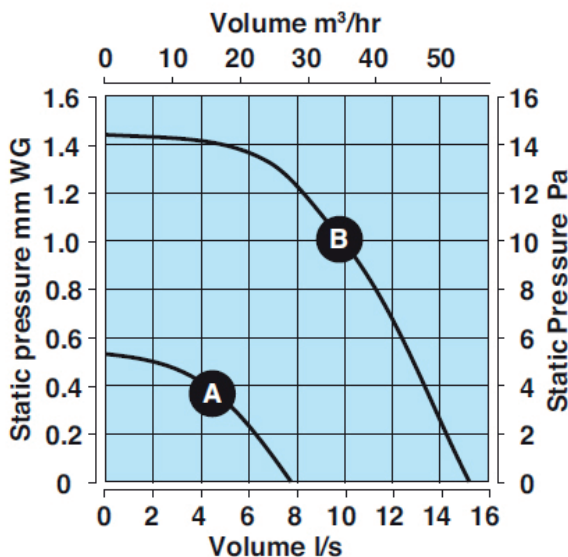

Installation Information

Designed to be mounted on walls or ceilings and discharged through a 100mm standard rigid or flexible duct, also suitable for use with flat channel systems.

| | |
|------------------|--------|
| Maximum pressure | 14.5pa |
| Sound Volume | 25(B)A |

| SPF | |
|---------------------------|------------|
| The SPF at Various Speeds | |
| Trickle | 0.43 W/l/s |
| Lower Boost | 0.36 W/l/s |



Tel: **+44 (0)117 923 5375**
Email: enquiries@addvent.co.uk