

AVX100 Enhance Ultra Quiet Range


Specification Sheet



Technical Details

Construction	Impact resistant ABS thermoplastic
Rating	220-240V ~50Hz ~AC
IP Rating	IPX4
Class	Double Insulated <input type="checkbox"/>
Motor	Single-phase induction motor with pre-oiled bearings; All with thermal overload protection Maximum operating Temperature 40°C
Approvals	BEAB, CE
Warranty	5 Years Exchange
Country of Origin	UK
Manufacturer	Addvent

Dimensions

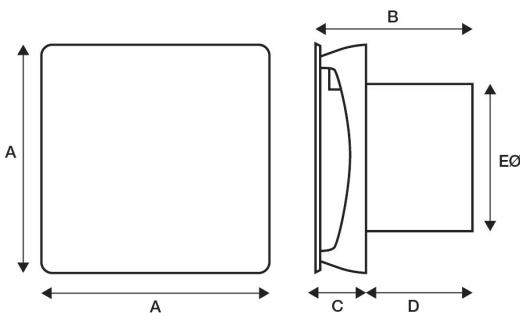

Model	A	B	C	D	EØ
AVX100EQT/EQTH	159	121	41	80	99

Key Features

- Select from 2 speeds
- High quality, long life motors continuously rated and warranted for 5 years
- 16d(B)A sound level on low speed
- 75m³/hr flow rate
- Complete with Back draft shutter
- Low energy with a maximum of 7 Watts

Models

Model No.	Product Description
AVX100EuQT	Enhance Ultra Quiet Fan with over run timer
AVX100EQTH	Humidistat Version of above

Additional Information

Specification	Flow (l/s)	Power (W)	Sound d(B) A @3m	Max Pressure (pa)
Hi Speed	21	7	29	20
Low Speed	15	7	16	20

Installation Information

Suitable for Wall or Panel Mounting only
 Designed to be installed with 100mm flexible or rigid ducting.
 Fan to be mounted at least 1.8m from the floor
 Fan Speed 2300RPM



Tel: **+44 (0)117 923 5375**
 Email: enquiries@addvent.co.uk