
## AVX120 Range Specification Sheet



Technical Details				
Construction	Impact resistant ABS thermoplastic			
Rating	220-240V ~50Hz ~AC 20W			
IP Rating	IP44			
Class	Double Insulated 🗆			
Motor	Single-phase induction motor with pre-oiled bearings; All with thermal overload protection Maximum operating Temperature 40°C			
Approvals	BEAB, CE, UKCA			
Warranty	5 Years Exchange			
Country of Origin	UK			
Manufacturer	Addvent			

Performance Details						
Specification	m³/ Hr	l/s	Pressure (pa) Max	` '	Power (W)	
AVX120 Range	130	36	35	41	20	





## **Key Features**

- 36 litres/sec (130m³/hr)
- Quiet in Operation
- Suitable for wall and ceiling installations

Models				
Model No.	Product Description			
AVX120SN	Enhance Ultra Quiet Fan with over run timer			
AVX120PN	Pull cord version of AVX120SN			
AVX120TN	Timer model with integrated overrun timer: I-20 mins			

## **Dimensions**



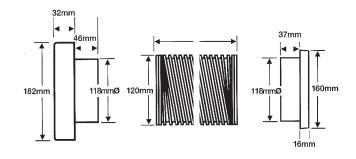

Additional Information			
Wall Hole Size	140mm Ø		



