


features

- up to 1,021m³/hour
- window or wall mounting
- class-leading performance

dimensions

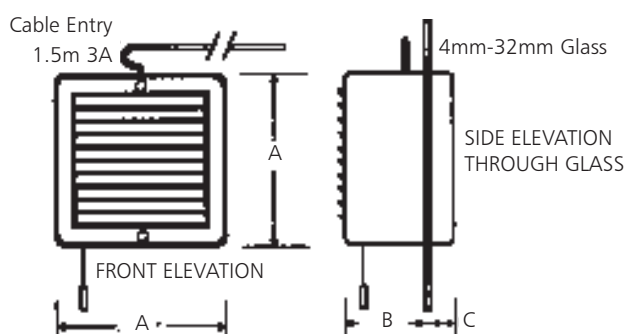


model	A	B	C	window hole size
AVX230N	286	125	25	260Ø
AVX300N	362	145	25	320Ø

performance

	airflow m ³ /hour	airflow litres/sec	noise level dB(A)@ 2m	power W
AVX230N	668	185	53	45
AVX300N	1100	306	60	82

performance for AVX Window range

See page 46 for AVX230 model performance

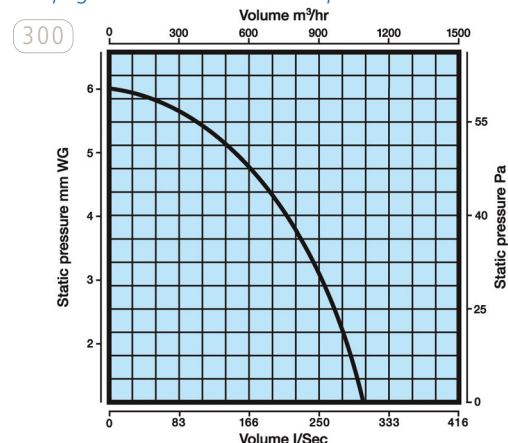

technical data

RATING: 220-240V ~AC; IP24; **CONSTRUCTION:** double-insulated impact-resistant ABS thermoplastic; **MOTOR:** 4 pole induction motor with pre-oiled bearings. Thermal overload protection; **MAXIMUM OPERATING TEMPERATURE:** 40°C. Double glazing screws for window fans available on request.

IP 44 ZONE U WARRANTY 5

EXCHANGE



key data: AVX300W

Airflow m ³ /hour	1100	Power Watts	82
litres/sec	306	Noise dB(A)	60

the window range

- AVX230WSN** Standard model with fixed louvres.
- AVX230WPN** Pull cord model.
- AVX230WMPN** Manual Pull cord model, pull cord operates shutters.
- AVX230WAN** Automatic model with thermo-activated shutters.
- AVX300WSN** Standard model with fixed louvres.
- AVX300WPN** Pull cord model.
- AVX300WMPN** Manual Pull cord model, pull cord operates shutters.
- AVX300WAN** Automatic model.

a range of accessories
are available for the
window fan range



accessories

- AVA299** 300mm Through-Wall Rigid Aluminium Vent Kit 400mm.
- AVA301** 230mm Through-Wall Ducting Kit 400mm.
- AVA302** 300mm Through-Wall Vent Kit – 400mm long with Grille.
- AVA351** Remote Timer – Standard fans only.
- AVA361** Remote Humidistat – Standard fans only.
- AVA362** Remote PIR – Standard fans only.

See pages 66-72 for the full range of accessories.

use of controllers

Model	150/6	230/9	300/12
AVACTRL2R	○	●+	○
AVACTRLV	●*	○	○
AVACTRLVRN	○	●+	●+

* EXCLUDES HUMIDISTAT MODELS

+ EXCLUDES MANUAL PULL CORD MODELS.